


SUNSTAR50-PENDANT (SR50-PD) PENDANT LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




Patented Fixture
Optional bubble acrylic attachment

PRODUCT NAME	SUNSTAR50-PD
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.8lb (.37kg) for 12"; 2.5lb (1.12kg) for 36"
LENGTH	8" or custom length
MOUNTING	Ceiling Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	130°

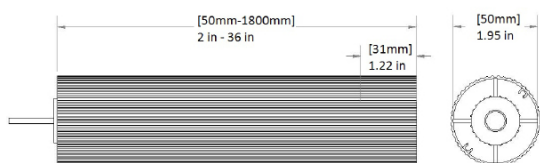


DAMP LOCATION [IP64]

Higher CRI (85, 90, or 95) are available upon request.

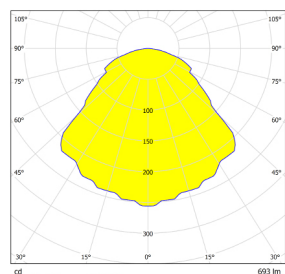

SR50M1X6-PD-35

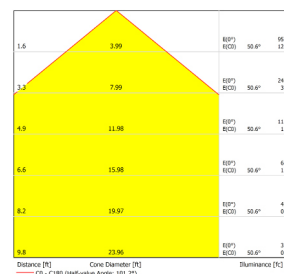

SR50M1X6-PD-35-D

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR50 M1X3 PD	700 mA	6.5 W	578 LM	89 LM/W
SR50 M1X6 PD	700 mA	6.5 W	693 LM	107 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE	HOUSING	CURRENT	HOUSING COLOR	
SR50		PD	-0700	-	
SR50	M1X3 1 MODULE 3 CHIPS	PD PENDANTS	0700 mA	SV SILVER	GR GREEN
	M1X6 1 MODULE 6 CHIPS			BK BLACK	PR PURPLE
				BR BROWN	CC CUSTOM COLOR
				BL BLUE	

COLOR TEMPERATURE	HOUSING LENGTH	BASE STYLE	ACRYLIC OPTION	ACRYLIC LENGTH
-	-	-	-	-
41 4100K	05 5 INCHES	TDS TRADITIONAL SUSPENDED BASE	w/o ACRYLIC	08 8 INCHES
35 3500K	08 8 INCHES	RCS RECESSED SUSPENDED BASE	A WITH ACRYLIC	CL CUSTOM LENGTH
30 3000K	12 12 INCHES			
27 2700K	CL CUSTOM LENGTH			

C-3

