




# SR50-WALL SCONCE INTERIOR WALL LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER





PRODUCT NAME	SUNSTAR50-WSIN
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.95lbs, (.43kg)
LENGTH	8"
MOUNTING	Wall Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°

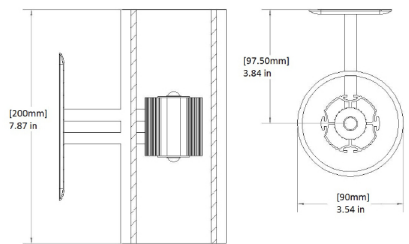

DAMP LOCATION [IP64]

Patented Fixture  
Also suitable for Exterior.



PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR50 M2X3	700 mA	13 W	1388 LM	106 LM/W
SR50 M2X6	700 mA	13 W	1664 LM	128 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

SR50M2X3-WSIN-35      SR50M2X3-WSIN-35

PRODUCT	LED MODULE SIZE	HOUSING	HOUSING COLOR	COLOR TEMPERATURE	WALL PLATE SIZE
SR50		-	-	-	-
SR50	M2X3    2 MODULES 3 CHIPS EACH	WSIN    INTERIOR WALL SCONCE	SV    SILVER	55    5500K	S    2.75" X 4.5"
			BK    BLACK	41    4100K	M    3.13" X 4.88"
	BR    BROWN		35    3500K	J    3.5" X 5.25"	
	CC    CUSTOM COLOR		27    2700K	N    NONE	

WALL PLATE COLOR	COVER
-	-
SS    STAINLESS STEEL WALL PLATE	6010    MARBLED GREEN
WT    WHITE WALL PLATE	9001    MARBLED ORANGE
CC    CUSTOM COLOR	9102    MARBLED BROWN

D-3

