





SUNSTRIP30 RETROFIT KIT

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	ST30 RETROFIT KIT
INPUT	1250mA
POWER FACTOR	>0.9
POWER CONSUMPTION	60W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum
WEIGHT	2.4 lb (1.1 kg)
LENGTH	44"
MOUNTING	Swivel Mount
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	90° or 120° diffused

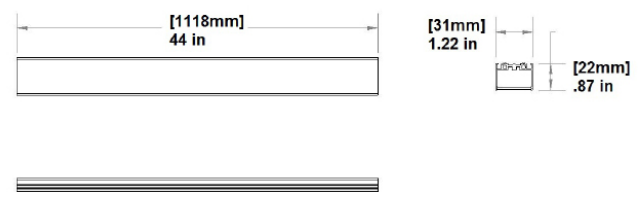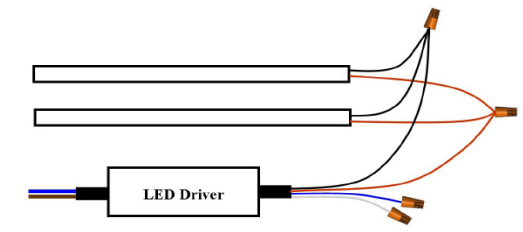

DAMP LOCATION [IP64]

The SunStrip30 is also suitable for Office Retrofit.



One Retrofit Kit includes two ST30Y44P4X15-50 Strips

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
KIT2-ST30Y44P4X15	1250 mA	60 W	9,400 LM	156 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,000K	4,100K	5,000K
LIGHT OUTPUT CONVERSION	.87	.90	.95	1
CRI	80	80	80	80

ST30Y44P4X15-50 (1 Strip)

PRODUCT	NUMBER OF STRIPS	LENGTH	LED MODULE SIZE	LED MODULE STYLE
KIT	2-ST30	Y44	P4X15	D
KIT	2 ST30 STRIPS	Y44 44"	P4X15 4 MODULES OF 15 CHIPS EACH	N/A 90° D 120°

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
SV SILVER	50 5000K	SMB SURFACE MOUNT BLACK
BK BLACK	41 4100K	SWV SWIVEL MOUNT
	30 3000K	MG MAGNETIC MOUNT
	27 2700K	
	RGB RGB	

L-3

