




SUNSTRIP30 (ST30) RECTANGULAR CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




Multiple fixtures can be connected as shown above

PRODUCT NAME	SUNSTRIP30
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	30W or 60W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum
WEIGHT	1.2 lbs (.55kg) or 2.4 lbs (1.1kg)
LENGTH	24", 36", 48" or 96"
MOUNTING	Recessed, Surface mounted, Swivel, Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Five year warranty
OPTICS	Optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90° Diffused 170°

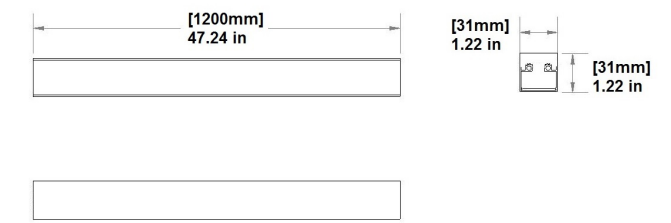

DAMP LOCATION [IP64]

ST30 Direct/Indirect fixtures can also be connected as shown
Higher CRI (85, 90, or 95) are available upon request.

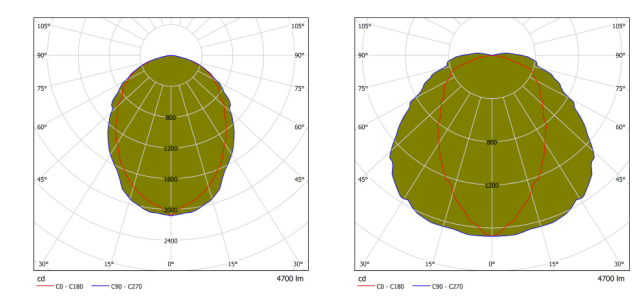

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST30Y48P4X15N	700 mA	30 W	4,700 LM	156 LM/W
ST30Y96P8X15N	1400 mA	60 W	9,400 LM	156 LM/W

CCT	2,700K	4,100K	5,000K
LIGHT OUTPUT CONVERSION	.87	0.95	1
CRI	80	80	80

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT
ST30			-
ST30	Y48 48 INCHES	P4X15N 4 MODULES WITH 15 CHIPS EACH	0700 mA
	Y96 96 INCHES	P8X15N 8 MODULES WITH 15 CHIPS EACH	1400 mA

DIFFUSED	HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
-	-	-	-
D DIFFUSED	SV SILVER	50 5000K	RCM RECESSED CEILING MOUNT
DD DOME DIFFUSED	BK BLACK	41 4100K	SM SURFACE MOUNT
ND NON-DIFFUSED		27 2700K	TDS TRADITIONAL SUSPENDED BASE
		30 3000K	RCS RECESSED SUSPENDED BASE
			WM WALL MOUNT
			SWV SWIVEL MOUNT

A-13

