

CEILING
COVE
PENDANTS
WALL
UNDER CABINET
ACCENT
EXTERIOR
SOFFIT
SMART CONTROL RGB
GREEN WALL
TUNNEL
WAREHOUSE
CAR WASH
SPECIAL APPLICATIONS
ACCESSORIES




ST30-DIRECT/INDIRECT CEILING LUMINAIRE


0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	SUNSTRIP30-Direct/Indirect
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	49.5W or 92.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum
WEIGHT	1.2lbs (.55kg) or 2.4lbs (1.10kg)
LENGTH	48" or 96"
MOUNTING	Suspended, Wall Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic and glass for the indirect, optional translucent diffuser for the direct
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	360°

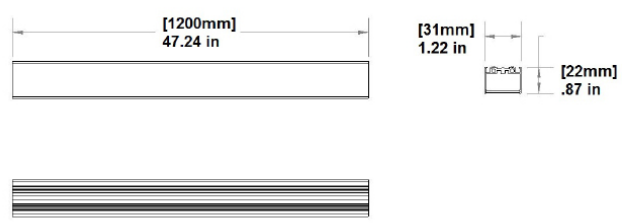

Higher CRI (85, 90, or 95) are available upon request.

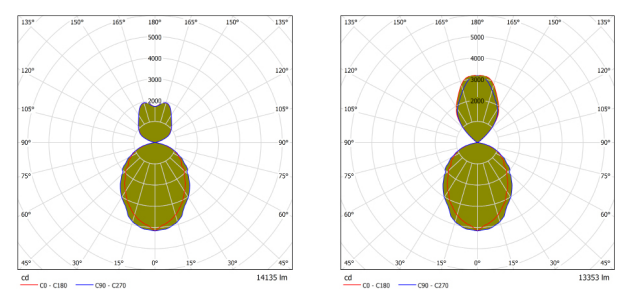

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST30 M3X3P4X15	700 mA	49.5 W	7526 LM	152 LM/W
ST30 M5X3P8X15	1400 mA	92.5 W	14135 LM	152 LM/W

CCT	2,700K	4,100K	5,000K
LIGHT OUTPUT CONVERSION	.87	.95	1
CRI	80	80	80

ST30Y96M5X3P8X15-D-50 ST30Y96M5X3P8X15-RD-50

PRODUCT	LENGTH	LED MODULE SIZE (UP)	LED MODULE SIZE (DOWN)	DIFFUSED
ST30				-
ST30	Y48 48 INCHES	M3X3 3 MODULES WITH 3 CHIPS	P4X15 4 MODULES WITH 15 CHIPS	D DIFFUSED
ST30	Y96 96 INCHES	M5X3 5 MODULES WITH 3 CHIPS	P8X15 8 MODULES WITH 15 CHIPS	RD RECESSED,DIFFUSED

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	ENDCAP
-	-	-	-
SV SILVER	50 5000K	RCS RECESSED SUSPENDED BASE	0 NO ENDCAPS
BK BLACK	41 4100K	TDS TRADITIONAL SUSPENDED BASE	1 ONE ENDCAP
	27 2700K	WM WALL MOUNT	*LEAVE BLANK FOR TWO ENDCAPS
	30 3000K		
A-17	RGB INDIRECT RGB		

