





# SUNSTRIP40 (ST40) EXTERIOR LUMINAIRE



0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	SUNSTRIP40
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W, 13W, or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.2 lb (0.07kg), 0.3 lb (0.15kg), or 1.3 lb (.57kg)
LENGTH	6", 12", or 48"
MOUNTING	Surface Mount, Magnet Mount, Swivel Surface or Wall Mount
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90° or Standard 120°

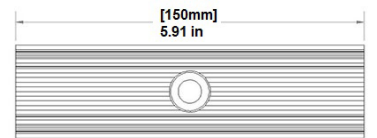

Higher CRI (85, 90, or 95) are available upon request.  
 Also Available in Tunable White



ST40Y48M10X3-35      ST40Y48M10X3-35-R

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M1X3	700 mA	6.5 W	849 LM	131 LM/W
ST40 M2X3	700 mA	13 W	1699 LM	131 LM/W
ST40 M10X3	1400 mA	65 W	8487 LM	131 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.9	1.0	1.05	1.11
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT	LED MODULE STYLE
ST40			-	-
ST40	Y06    6 INCHES	M1X3    1 MODULE WITH 3 CHIPS	0700    mA	N/A    120°
	Y12    12 INCHES	M2X3    2 MODULES WITH 3 CHIPS EACH	0700    mA	R    90°
	Y48    48 INCHES	M10X3    10 MODULES WITH 3 CHIPS EACH	1400    mA	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	LOCATION
-	-	-	
SV    SILVER	55    5500K	SMB    SURFACE MOUNT BLACK	EX    EXTERIOR WET
BK    BLACK	41    4100K	MG    MAGNET MOUNT	
	35    3500K	SWV    SWIVEL MOUNT	
	27    2700K		
	27/55    CCT TUNING		

G-1

