




SUNSTRIP40 (ST40) CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700 or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	39W or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	1.0 lbs (.44kg) or 1.3 lbs (0.57kg)
LENGTH	36" or 48"
MOUNTING	Magnet Mounted, Swivel Mounted, Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°




UL US LISTED **CE** DAMP OR WET LOCATIONS

Higher CRI (85, 90, or 95) are available upon request.

May be Magnetized to Metal Surface
Brackets are also available for Surface Mount



ST40Y48M10X6-55




ST40Y48M10X6-R-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40Y36M6X6	700 mA	39 W	6,790 LM	174 LM/W
ST40Y48M10X6	700 mA	65 W	11,318 LM	174 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE TYPE	CURRENT	BEAM ANGLE	HOUSING COLOR	COLOR TEMPERATURE					
ST40	Y48		-1400		-	-					
ST40	Y36	36 INCHES	M6X3	6 MODULES 3 CHIPS EACH	0700 mA	N/A	120°	SV	SILVER	55	5500K
	Y36	36 INCHES	M6X6	6 MODULES 6 CHIPS EACH	0700 mA	R	90°	BK	BLACK	41	4100K
	Y48	48 INCHES	M10X3	10 MODULES 3 CHIPS EACH	1400 mA					35	3500K
	Y48	48 INCHES	M10X6	10 MODULES 6 CHIPS EACH	1400 mA					27	2700K
										27/55	CCT TUNING

MOUNTING BRACKET STYLE	LOCATION		
-	-		
SW	SWIVEL MOUNT	EX	EXTERIOR WET
SMB	BLACK SURFACE MOUNT		
MG	MAGNETIC MOUNT		
RCS	RECESSED SUSPENDED		
TDS	TADITIONAL SUSPENDED		

A-21

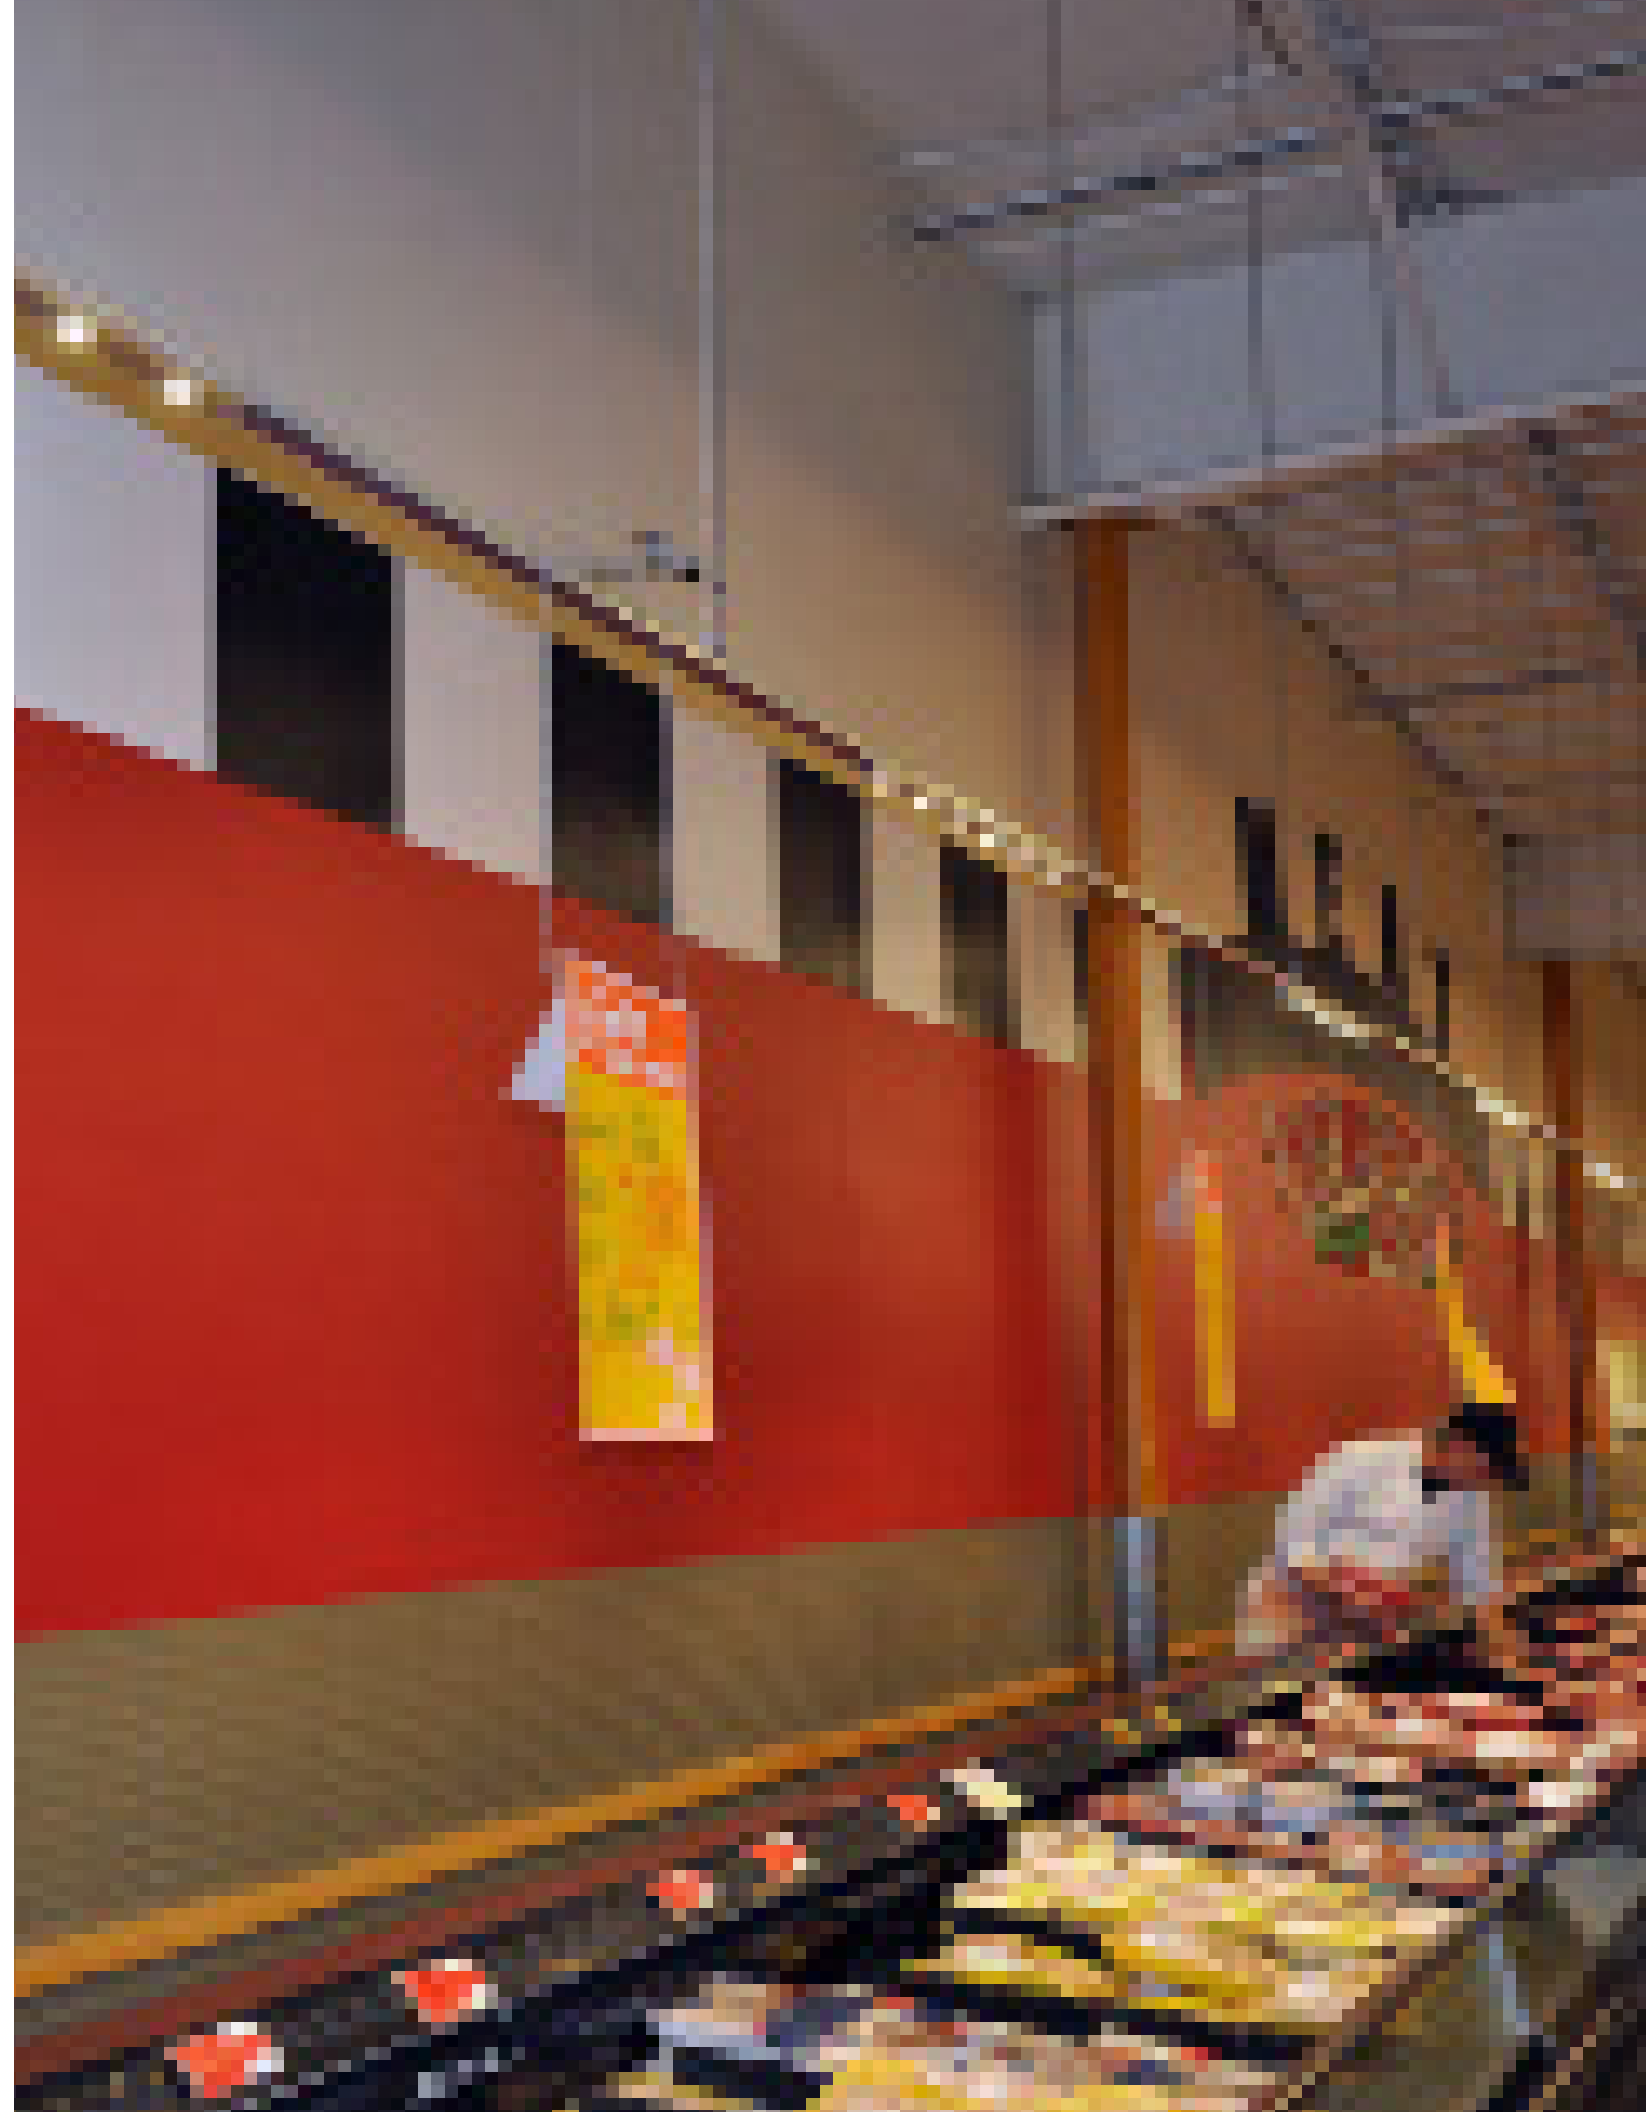



SUNSTRIP40 GYMNASIUM LUMINAIRE




0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	SUNSTRIP40
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	39W or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	1.0 lb (.44kg) or 1.3 lb (.57kg)
LENGTH	36" or 48"
MOUNTING	Swivel Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°



DAMP/WET LOCATION [IP64/IP66]

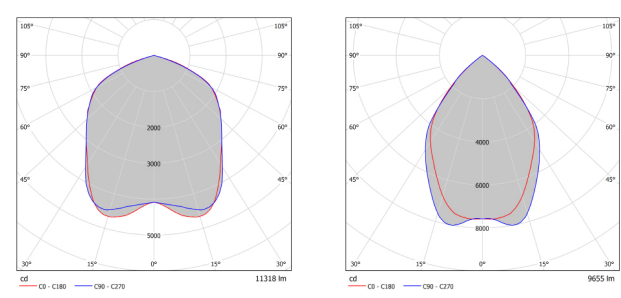

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M6X6	700 mA	39 W	6789 LM	174 LM/W
ST40 M10X6	700 mA	65 W	11318 LM	174 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	0.90	0.95	1
CRI	80	80	80	75

ST40Y48M10X6-55 ST40Y48M10X6-R-55

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT	LED MODULE STYLE
ST40			-	-
ST40	Y36 36 INCHES	M6X3 6 MODULES 3 CHIPS EACH	0700 mA	N/A 120°
ST40	Y36 36 INCHES	M6X6 6 MODULES 6 CHIPS EACH	0700 mA	R 90°
ST40	Y48 48 INCHES	M10X3 10 MODULES 3 CHIPS EACH	1400 mA	
ST40	Y48 48 INCHES	M10X6 10 MODULES 6 CHIPS EACH	1400 mA	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
-	-	
SV SILVER	55 5500K	SMB SURFACE MOUNT BLACK
BK BLACK	41 4100K	SWV SWIVEL MOUNT
	35 3500K	MG MAGNETIC MOUNT
	27 2700K	CHM ADJUSTABLE CHANNEL MOUNT
	27/55 CCT TUNING	

A-23






SUNSTRIP40 (ST40) COVE LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	13W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.3 lbs (.15kg)
LENGTH	12"
MOUNTING	Swivel Mount, Surface Mount, Magnet Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector,
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	90° or 120°

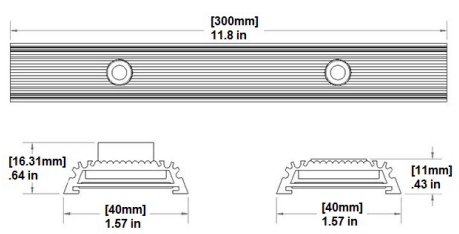

DAMP OR WET LOCATIONS [IP64/IP66]

Higher CRI (85, 90, or 95) are available upon request.
Also Available in Tunable White or RGB

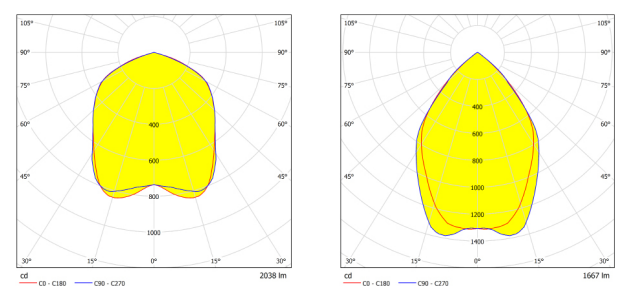

ST40Y12M2X6-35 ST40Y12M2X6-R-35

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M2X3	700 mA	13 W	1,886 LM	145 LM/W
ST40 M2X6	700 mA	13 W	2,264 LM	174 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.11
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE TYPE	BEAM ANGLE	CURRENT	HOUSING COLOR	COLOR TEMPERATURE
ST40	Y12			-0700	-	-
ST40	Y12 12 INCHES	M2X3 2 MODULES 3 CHIPS EACH	N/A For 120°	0700 mA	SV SILVER	55 5500K
		M2X6 2 MODULES 6 CHIPS EACH	R For 90°		BK BLACK	41 4100K
					CC CUSTOM COLOR	35 3500K
						27 2700K
						27/55 CCT TUNING

MOUNTING BRACKET STYLE	LOCATION
-	-
SW SWIVEL MOUNT	W WET LOCATION
SMB SURFACE MOUNT	
MG MAGNET MOUNT	




SUNSTRIP40 WAREHOUSE LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	39W or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	1.0 lb (.44kg) or 1.3 lb (.57kg)
LENGTH	36" or 48"
MOUNTING	Magnet Mount, Swivel Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°




DAMP/WET LOCATION [IP64/IP66]



The SunStrip40 is also suitable for Ceiling, GreenWall, Gymnasium, Exterior and Parking Garage and Tunnel.



ST40Y48M10X6-55



ST40Y48M10X6-R-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M6X6	700 mA	39 W	6789 LM	174 LM/W
ST40 M10X6	700 mA	65 W	11318 LM	174 LM/W

Specialty designs with different chips per module available upon request


CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT	LED MODULE STYLE
ST40			-	-
ST40	Y36 36 INCHES	M6X3 6 MODULES 3 CHIPS EACH	0700 mA	N/A 120°
ST40	Y36 36 INCHES	M6X6 6 MODULES 6 CHIPS EACH	0700 mA	R 90°
ST40	Y48 48 INCHES	M10X3 10 MODULES 3 CHIPS EACH	1400 mA	
ST40	Y48 48 INCHES	M10X6 10 MODULES 6 CHIPS EACH	1400 mA	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
-	-	
SV SILVER	55 5500K	SMB SURFACE MOUNT BLACK
BK BLACK	41 4100K	SWV SWIVEL MOUNT
	35 3500K	MG MAGNETIC MOUNT
	27 2700K	CHM ADJUSTABLE CHANNEL MOUNT
	27/55 CCT TUNING	

L-1

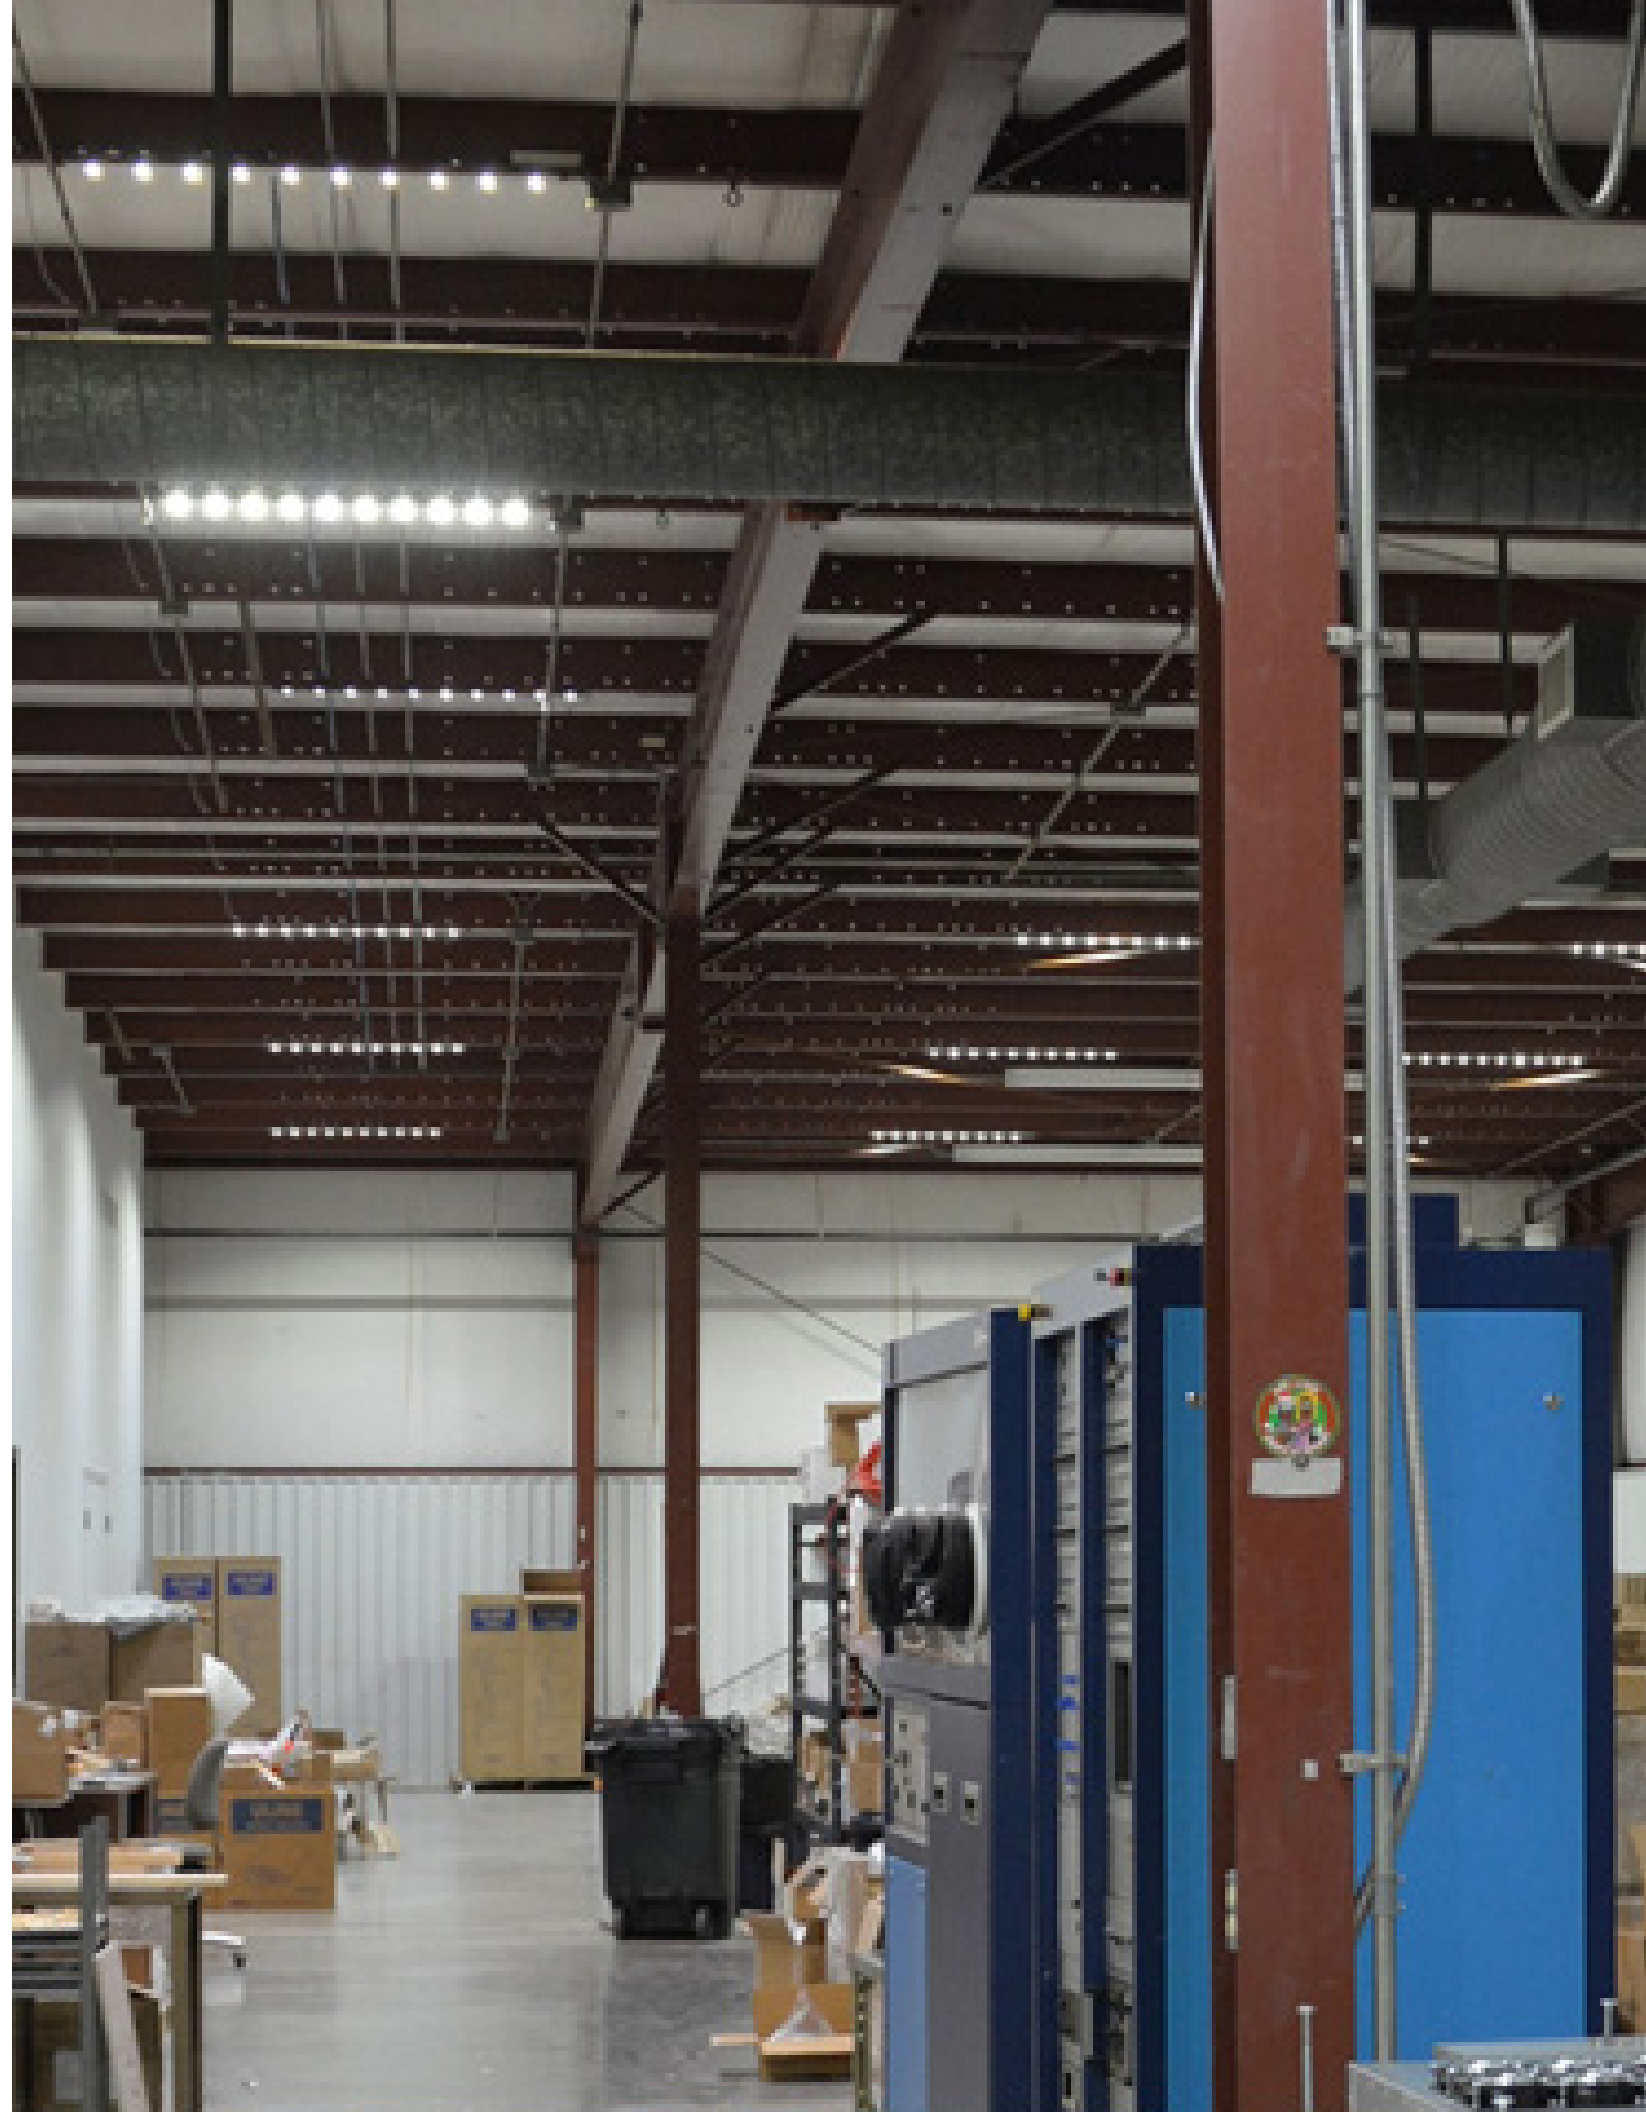

SUNSTRIP40 CAR WASH LUMINAIRE



0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	39W or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	1.0 lb (.44kg) or 1.3 lb (.57kg)
LENGTH	36" or 48"
MOUNTING	Swivel Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°




DAMP/WET LOCATION [IP64/IP66]



The SunStrip40 is also suitable for Greenwall, Exterior, Warehouse, Parking Garage and Tunnel.



ST40Y48M10X3-S5



ST40Y48M10X3-R-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M6X6	700 mA	39 W	6789 LM	174 LM/W
ST40 M10X6	700 mA	65 W	11318 LM	174 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	0.86	0.90	0.95	1
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT	LED MODULE STYLE
ST40			-	-
ST40	Y36 36 INCHES	M6X3 6 MODULES 3 CHIPS EACH	0700 mA	N/A 120°
	Y36 36 INCHES	M6X6 6 MODULES 6 CHIPS EACH	0700 mA	R 90°
	Y48 48 INCHES	M10X3 10 MODULES 3 CHIPS EACH	1400 mA	
	Y48 48 INCHES	M10X6 10 MODULES 6 CHIPS EACH	1400 mA	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	LOCATIONS
-	-	-	-
SV SILVER	55 5500K	SMB SURFACE MOUNT BLACK	EX EXTERIOR WET
BK BLACK	41 4100K	SWV SWIVEL MOUNT	
	35 3500K	MG MAGNETIC MOUNT	
	27 2700K	CHM ADJUSTABLE CHANNEL MOUNT	
	27/55 CCT TUNING		

M-1



CEILING
COVE
PENDANTS
WALL
UNDER CABINET
ACCENT
EXTERIOR
SOFFIT
SMART CONTROL RGB
GREEN WALL
TUNNEL
WAREHOUSE
CAR WASH
SPECIAL APPLICATIONS
ACCESSORIES