





SUNSTRIP40 (ST40) UNDER CABINET LUMINAIRE



0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700mA or 12VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	~0.1 lb (0.05 kg)
LENGTH	6"
MOUNTING	Surface Mount, Swivel Mount, Magnet Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°

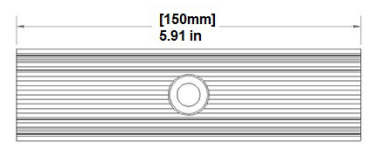

DAMP/WET LOCATION [IP64/IP66]

Higher CRI (85, 90, or 95) are available upon request.
Also Available in Tunable White

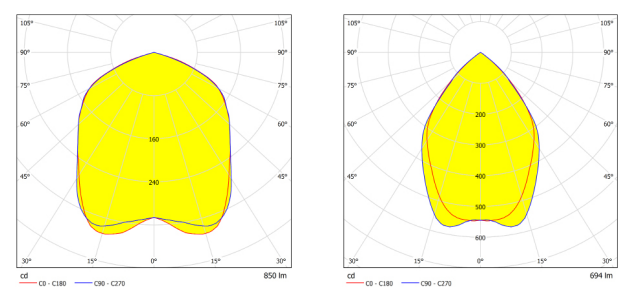

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40 M1X3	700 mA	6.5 W	850 LM	131 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.11
CRI	80	80	80	75

ST40Y06M1X3-35 ST40Y06M1X3-R-35

PRODUCT	LENGTH	LED MODULE SIZE	LED MODULE STYLE	CURRENT / VOLTAGE
ST40			-	-
ST40	Y04 4 INCHES	M1X3 1 MODULE WITH 3 CHIPS	N/A 120°	0700 700 mA
	Y06 6 INCHES	M1X6 1 MODULE WITH 6 CHIPS	R 90°	12 12VDC

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
-	-	
SV SILVER	55 5500K	SMB SURFACE MOUNT BLACK
BK BLACK	41 4100K	SWV SWIVEL MOUNT
	35 3500K	MG MAGNET MOUNT
	27 2700K	
	27/55 CCT TUNING	

E-3

