


SR25-WALLSCONCE(W S25) WALL LUMINAIRE



0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	WALLSCONCE25
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	13W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.7lbs (.33kg)
LENGTH	8"
MOUNTING	Wall Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°

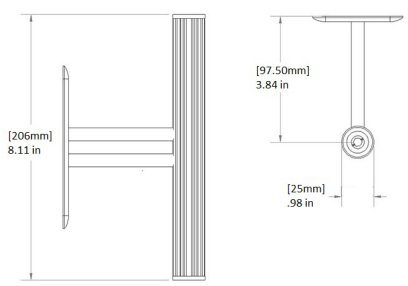

Patented Fixture
Also suitable for Exterior.

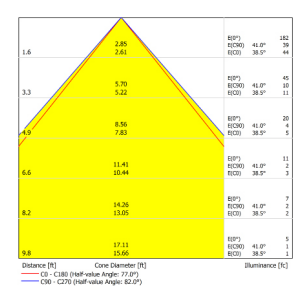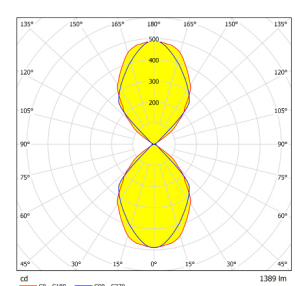

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
WS25 M2X3	700 mA	13 W	1388 LM	106 LM/W
WS25 M2X6	700 mA	13 W	1664 LM	128 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

WS25M2X3-35 WS25M2X3-35

PRODUCT	LED MODULE SIZE	CURRENT	HOUSING COLOR	COLOR TEMPERATURE	HOUSING LENGTH
WS25		-0700		-	-
WS25	M2X3 2 MODULES 3 CHIPS EACH	0700 mA	SV SILVER	55 5500K	08 8 INCHES
	M2X6 2 MODULES 6 CHIPS EACH		BL BLUE	41 4100K	12 12 INCHES
			BK BLACK	35 3500K	CL CUSTOM LENGTH
			GR GREEN	27 2700K	
			PR PURPLE	27/55 CCT TUNING	
			CC CUSTOM COLOR	RGB RGB	

WALL PLATE SIZE	WALL PLATE COLOR
S 2.75" X 4.5"	SS STAINLESS STEEL
M 3.13" X 4.88"	WT WHITE
J 3.5" X 5.25"	CC CUSTOM COLOR

D-1

